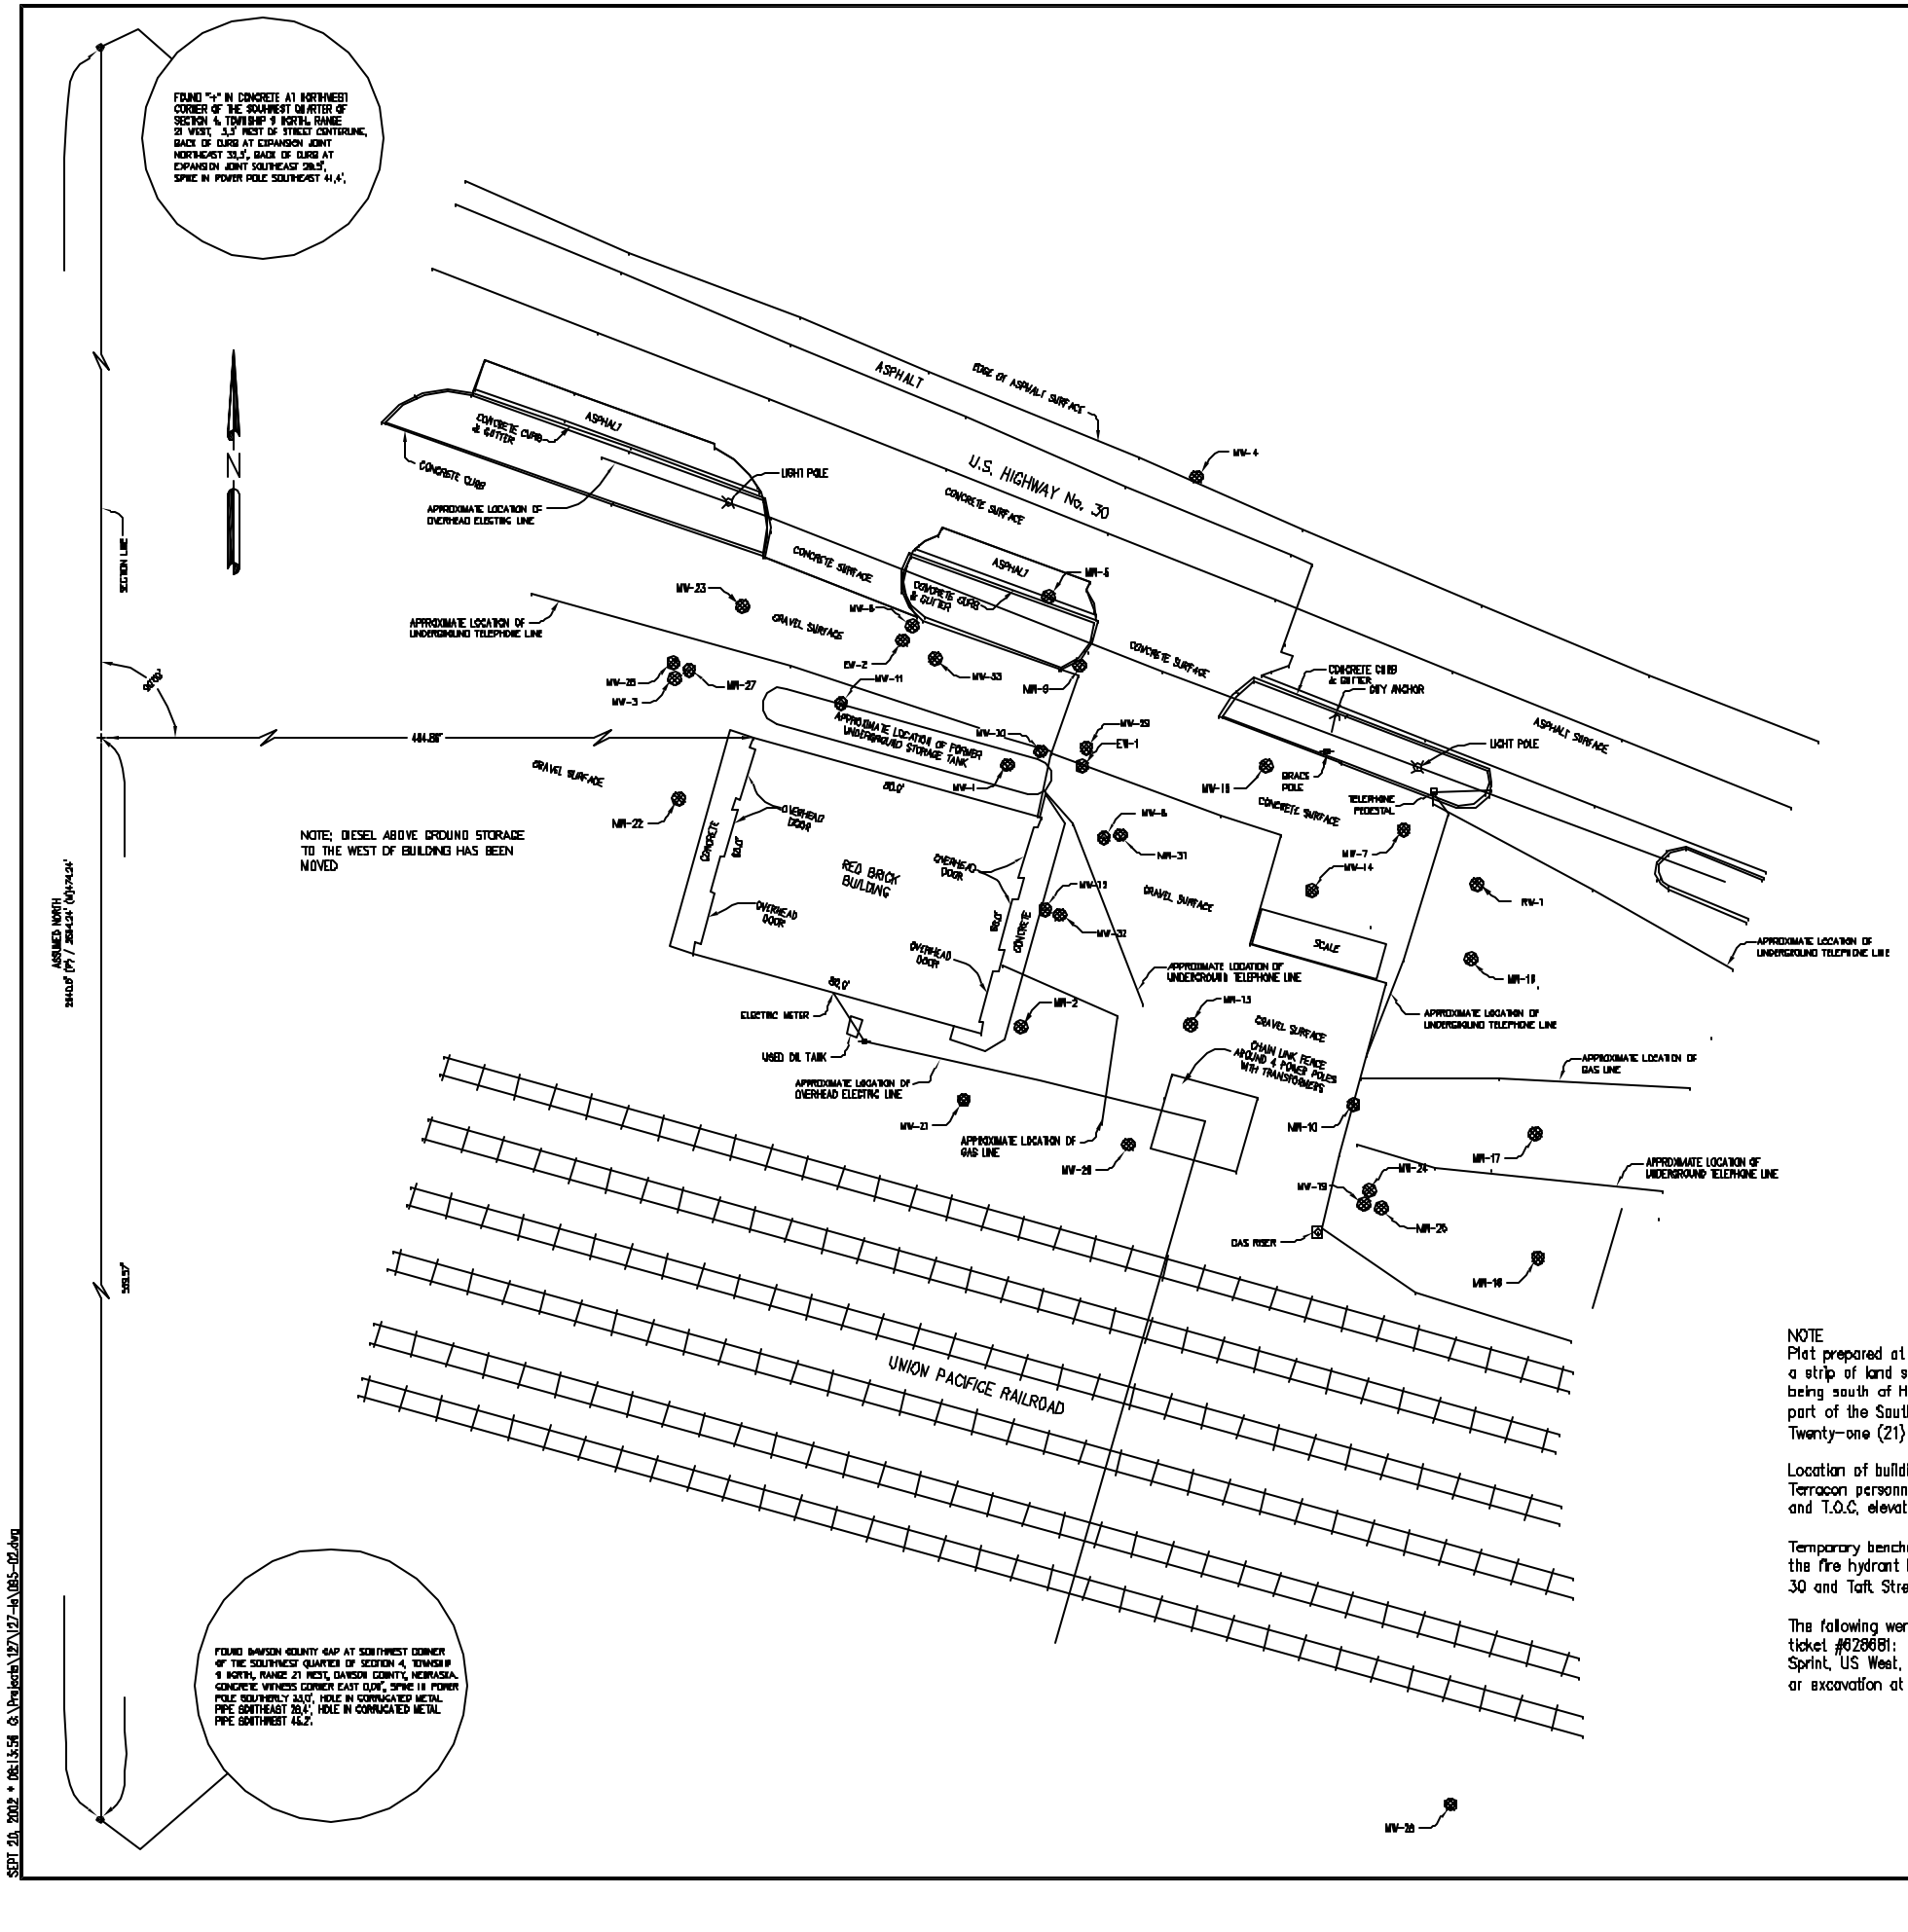

MONITORING WELL No.	TOP OF CASING ELEVATION	RIM ELEVATION
MW-1	2388.64	2388.85
MW-2	2388.13	2388.53
MW-3	2385.74	2386.04
MW-4	2388.52	2388.78
MW-5	2388.49	2388.95
MW-6	2386.18	2386.42
MW-7	2388.03	2388.30
MW-8	2388.01	2386.41
MW-9	2388.19	2388.63
MW-10	2386.40	2386.86
MW-11	2385.97	2386.16
MW-12	2386.13	2386.48
MW-13	2386.31	2386.82
MW-14	2386.33	2386.61
MW-15	2385.85	2386.14
MW-16	2386.49	2386.78
MW-17	2386.20	2386.53
MW-18	2386.36	2386.58
MW-19	2386.82	2386.86
MW-20	2386.08	2386.42
MW-21	2386.25	2386.62
MW-22	2386.07	2386.41
MW-23	2385.81	2386.10
MW-24	2386.57	2386.83
MW-25	2386.27	2386.59
MW-26	2385.82	2385.99
MW-27	2385.97	2386.16
MW-28	2383.10	2383.41
MW-29	2385.45	2386.06
MW-30	2385.65	2386.11
MW-31	2385.79	2386.44
MW-32	2385.99	2388.65
MW-33	2386.11	2386.42
RW-1	2386.30	2386.59
EW-1	2385.81	2386.46
EW-2	2388.28	2386.45

0 15 30 60
SCALE IN FEET

- ⊕ = CORNERS FOUND
- ⊗ = MONITORING WELL
- = UNDERGROUND ELECTRIC LINE
- = OVERHEAD ELECTRIC LINE
- = POWER OR BRACE POLE
- = LIGHT POLE
- = UNDERGROUND TELEPHONE LINE
- = TELEPHONE PEDESTAL
- = GAS RISER
- = GAS LINE
- = CHAIN LINK FENCE

NOTE
Plat prepared at the request of Terracon, 2277 West Spencer Street, Appleton, WI 54914, on a strip of land situated in the City of Lexington on Union Pacific Railroad right-of-way and being south of Highway 30, north of Union Pacific Railroad tracks and east of Taft Street in part of the Southwest Quarter (SW1/4) of Section Four (4), Township Nine (9) North, Range Twenty-one (21) West of the Sixth Principal Meridian, Dawson County, Nebraska.

Location of buildings, improvements and existing monitoring wells shown are as directed by Terracon personnel. Elevations on monitoring wells include both ground surface elevations and T.O.C. elevations.

Temporary benchmark (T.B.M.) equals 2389.04 feet of elevation on the northwest capbolt of the fire hydrant located at the northwest quadrant of the intersection of U.S. Highway No. 30 and Taft Street (1929 datum).

The following were notified to locate utilities at the site as per Digger's Hotline of Nebraska ticket #628681: Charter Digital Communications, City of Lexington, Kinder Morgan, MCI, Sprint, US West. Contact all utility companies for exact locations prior to any construction or excavation at Digger's Hotline of Nebraska (800) 331-5666.

Miller & Associates